

- To check or modify your key programming.
- Calling from your personal directory.

Light
indicating messages received.

Mute key so that your correspondent can no longer hear you.
Intercom so that your terminal automatically answers a call without having to lift the receiver.

Hang-up key
To terminate a call or programming.

Audio keys

Loudspeaker:
to share a conversation

to increase loudspeaker or receiver volume

Hands free:
to make or answer a call without lifting the receiver.

Alphabetic keypad

Protected by a flap, used for call by name, message service and programming. You have a self-adhesive "Memo" label to stick inside the flap..

Display

The screen displays several pages of information concerning the present call.

Programmable keys and icons

To make a call, activate a service or manage your calls. Icons are associated with each of these keys.

Call icons:

- Incoming call (flashing).
- Call in progress.
- Call on hold.
- Call on common hold.

Function icons:

- Function active.
- Function requiring action.
- Terminal or line busy.

Preprogrammed function keys:

- Display new page.
- Divert your calls to another terminal.
- Three-way conference.
- Automatically redial the last number dialled.

- Access the various mail services.
- Transfer call to another terminal.

Using your telephone

Identify the terminal you are on

- Press this key twice.

Making a call



lift the receiver hands free programmed line key dial the number for your call

To make an external call, dial the outside line access code before dialling your correspondent's number.

Receiving a call



lift the receiver hands free

Redialling



select the "Redial" function select the No. in the last ten issued call required number

Requesting automatic callback if internal number is busy




Directory

Using call by name



Programming your personal directory

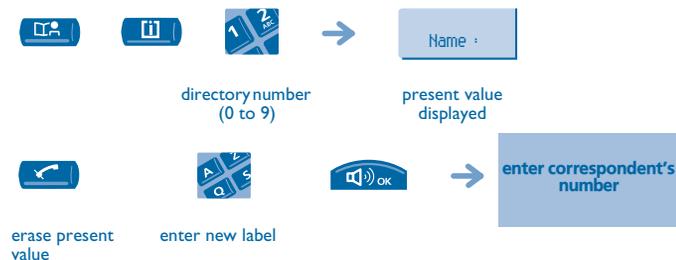

Calling from your personal directory



Warning

The earcap region of this telephone may attract and retain small metallic objects.

Guarantee and clauses

We, Alcatel Business Systems, hereby declare that we assume the Alcatel Premium Reflexes to be compliant with the essential requirements of Directive 1999/5/CE of the European Parliament and Council.

Any unauthorised modification to the product shall render this declaration of compliance null and void. A copy of the original of this declaration of compliance can be obtained by post from :

Alcatel Business Systems - Technical Services - Approvals Manager
I, route du Dr. Albert Schweitzer - F 67408 Illkirch Cedex - France



3EH21041BSAA010320

Divert your calls to another number

Divert your calls to another number



divert number called

Diverting your calls to your voice message service



When you return, cancel all diversions



During a conversation

Sending DTMF signals

During a conversation you sometimes have to send DTMF signals, such as with a voice server, an automated attendant or a remotely consulted answering machine. The function is automatically cancelled when you hang up.

during a conversation



“DTMF End to End” programmed key or function code same key to cancel

Calling a second person during a conversation

During a conversation, to call a second person.



dial enter the first letters of the name line key

Receiving a second call

During a conversation, another person is trying to call you.



caller's name or number flashing for 3 seconds

press line key with icon flashing

Switching between two calls (Broker call)

During a conversation, a second call is on hold. To accept the second call:



press line key with icon flashing

Transferring a call

During a conversation, to transfer the call to another number.



number called transfer

Three-way conference


During a conversation, a second call is on hold.



three-way conference cancel conference and return to first correspondent hang up on all correspondents

Store a number

To store the displayed number in the personal directory while a communication is in progress:



select a record in the directory enter the name of your correspondent apply (twice)

Voice message service

Initializing your voice mailbox

light flashes



enter your personal code then record your name according to voice guide instructions

As long as your voice mailbox has not been initialized, personal code is 1515.

Modifying your personal code

Your personal code is used to access your voice mailbox and to lock your telephone.



options personal code old code (4 digits)




new code (4 digits) apply

Consulting your voice mailbox

The light indicates that messages have been received.



personal code

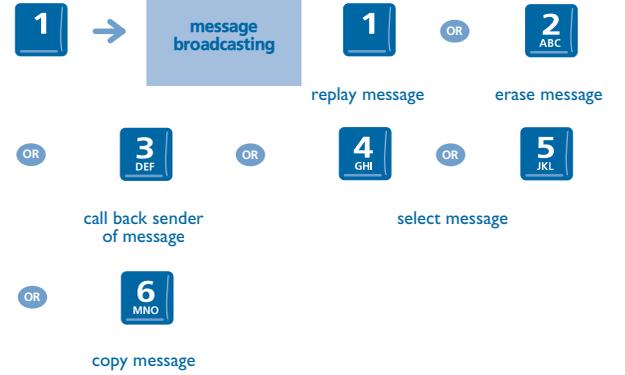

Customize your terminal

Adjusting the audio functions



ringer

press repeatedly on



choose ringer



choose volume



apply

Adjusting screen brightness



brightness

press repeatedly on




choose brightness



apply

Installing the programmable key label

A printed label is supplied with the terminal. This should be installed beneath the programmable keys.

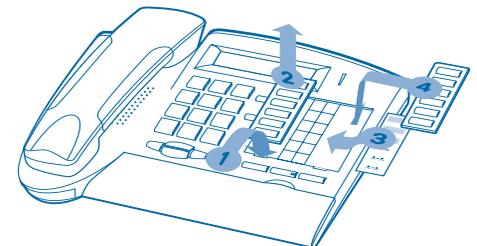

1. Insert a flat “blade” into the slot (1 slot per key block).
2. Raise the cover.
3. Slide the printed label into position.
4. Replace the cover.